


JAMAK-C-HF C-PRO 2X(2+1)X0,5

Symmetrical halogen free data cable for industrial control equipment

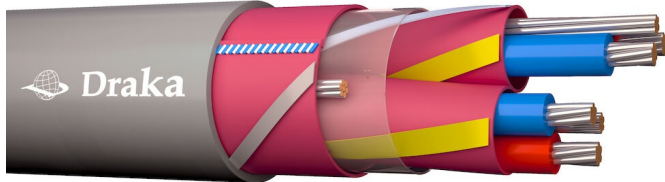

GENERAL INFO

Product family description

These symmetrical data transmission cables are used in control and supervision centre for industrial sites. They are suitable for fixed installation inside housings.

Nominal voltage U [V]

Discover E Path: baltics.prysmian.com/en/e-path

50

CERTIFICATIONS AND DESIGN STANDARDS



EN 50575:2014/A1:2016
EN 60332-3

EN 60332-1-2

EN 61034-2

IEC 60754

CABLE DESIGN

Conductor material	Copper
Conductor surface	Tinned
Core insulation material	Polyethylene (PE)
Drain wire	Yes
Screen over stranding element	Foil
Screen over stranding	Foil
Material outer sheath	Thermoplastic polymer

APPLICATION PROPERTIES

Max. conductor temperature [°C]	70
Permitted cable outer temperature after assembling without vibration (min) [°C]	-30
Permitted cable outer temperature after assembling without vibration (max) [°C]	60
Permitted cable outer temperature during assembling/handling (min) [°C]	-5
Permitted cable outer temperature during assembling/handling (max) [°C]	40
Bending radius (rule)	15 x D under maximum tension 10 x D without tension

Self-extinguishing	Yes
Flame retardant	In accordance with EN 13501-6
Halogen free	acc. IEC/EN 60754-1/2
Halogen free (acc. IEC 60754-2)	Yes
Low smoke (acc. IEC 61034-2)	Yes
Reaction-to-fire class (acc. EN 13501-6)	Cca
Smoke development class (acc. EN 13501-6)	s1
Euro class flaming droplets/particles (acc. EN 13501-6)	d1
Euro class acidity (acc. EN 13501-6)	a1

PROPERTIES

Product name	JAMAK-C-HF C-PRO 2X(2+1)X0,5
Diameter conductor [mm]	
Number of cores	4
Number of stranding elements	2
Nominal outer diameter [mm]	10
Cable weight [kg/km]	90
DOP number	1011360

Item name	EAN-code (GTIN)	Packaging type	Standard packaging quantity
JAMAK-C-HF C-PRO 2X(2+1)X0,5 MM2		Drum	1,000